
INTELLISCAN

Thirty Three-Zone

RSD Security Scanners

Intelliscan Walk Through Metal Detector 33 Zones



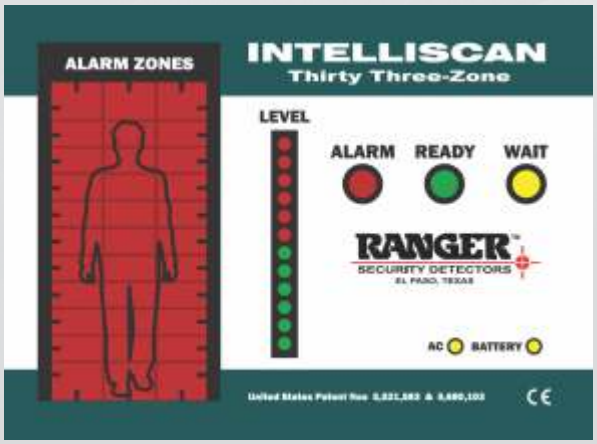

Intelliscan 33 Zone Graphics Alarm Display

The Intelliscan 33 Zone is RSDSS Top of the line Walk Trough Metal Detector. The Ranger Intelliscan revolutionized security metal detector screening and continues to set the standard for advanced technology metal detectors.

- 33 Independent Detection Zones
- Smart traffic counter
- Discrimination Capable
- Factory and user Definable Presets
- Integrated Floor Mounting Boots
- Traffic Pacing stop and go lights
- Iluminated Panel Alarm Display
- 180 Degree View Angle Panel LED'S
- United States Patented Technology

U.S. PATENT NUMBERS
5,521,58, 5,680,103, & 5,973,595

www.rsdss.com
email us: sales@rsdss.com

Always on Target

Specifications

INTELLISCAN
Thirty Three-Zone

Applications of the Intelliscan Multi-Zone

- Aiports and Seaports
- Government Buildings
- Embassies
- Police Facilities
- Courthouses
- Prisons and Jails
- Military Bases
- Hospitals
- Banks
- Financial Institutions
- Colleges and Schools
- Hotels and Casinos
- Power Plants
- Research Sites
- Sports Stadiums
- Public Transportation
- Public Landmarks
- Factories and Warehouses
- Broadcast Studios
- Museums
- Night Clubs

General Features of the Intelliscan Multi-Zone

- 33 Independent Detection Zones
- Advanced Discrimination Capabilities
- 20 Security Level Program Factory Presets
- 4 User Programmable Processor
- Digital Signal Processing and Diagnostics
- Interference Rejection Circuitry
- 100 Adjustable Zone Sensitivity
- -99 to +99 Horizontal Sensitivity Boost
- Continuous Wave Technology
- Harmless to Pacemakers and Pregnant Women
- Meets IP 65 Standards for water protection (optional)
- Smart Traffic Counter

Dimensions, Weight, and Power requirements

36 inch wide headers available upon request.



Shipping Dimensions and Weight
Header:
34" x 11" x 25" (85 x 27.5 x 62.5 cm)
37 lbs. (16.78 kg)

Side Panels:
91" x 9" x27" (227.5 x 22.5 x 67.5 cm)
144 lbs (65.45 kg)

Power Requirements:
115-230 VAC, 50-60 Hz

Optional Features Available

INTERNAL RECHARGABLE BATTERY

To obtain 6 - 8 hours battery operation.





WHEEL KIT

Wheel kit with handle for easy relocation of walk through metal detector.

REMOTE ALARM DISPLAY

Fiber optic alarm display for remote monitoring of detector activity





REMOTE CONTROL

Remote control for easily programing



RANGER NET

Ranger Net networking hard-ware and software. Permits Ranger walk through detectors to be monitored, controlled and interfaced with other security devices via secure PC network

www.rsdss.com
email us: sales@rsdss.com

Always on Target